



Taberna

Glazed Ceramic Wall Tile



Stout
4.25" x 12.75"



Rye
4.25" x 12.75"


Simulated Grout Joint



4"

2"

Trim (available in all colors)

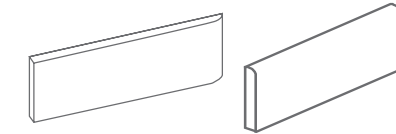

S 4C49
4.25" x 12.75"

S 44C9
4.25" x 12.75"

Technical Data



Tile Applications: Residential Light Commercial Commercial

Floors			
Walls/backsplashes	•	•	•
Countertops	•	•	•

*Not recommended for ramps or floor areas exposed to water or heavy grease accumulation

Property:	Results	ANSI Standards	ASTM #:
Chemical Resistance	Resistant	As Reported	ASTM C650
Bonding Strength (psi)	>50	>=50	ASTM C482
Water Absorption	<20%	<20%	ASTM C373
Breaking Strength	> 150 lbs.	>150	E.N. ISO 13006
Stain Resistance	Resistant	As reported	ASTM C1378
Crazing Resistance	Resistant	Resistant	ASTM C424