



### USAGE INFORMATION

TILE APPLICATIONS	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
Floors			
Walls/Backsplashes	•	•	•
Countertops			
Exterior			

PLEASE NOTE: Not recommended for ramps or floor areas exposed to water or heavy grease accumulation.

### TECHNICAL INFORMATION

TEST	RESULTS	ANSI STANDARDS	ASTM #
Abrasion Resistance (PEI)	Class 0	Class 0-V	ASTM C1027
Chemical Resistance	Resistant	As Reported	ASTM C650
Bonding Strength (psi)	>50 psi	>50 psi	ASTM C482
Dynamic Coefficient of Friction (DCOF)*	>0.42	As Reported	ANSI A 137.1-2012
Scratch Hardness	8.0	MOHS 1-10	MOHS Scale
Water Absorption	<20.0%	7.0% - 20.0%	ASTM C373
Breaking Strength	>150 lbf	>125 lbf.	ASTM C648
Frost Resistance	Resistant	As Reported	ASTM C1026
Stain Resistance	Resistant	As Reported	ASTM C1378
Crazing Resistance	Resistant	As Reported	ASTM C424
Thermal Shock	Resistant	As Reported	ASTM C484

\*It is important to note that Dynamic Coefficient of Friction results can vary after installation due to the presence of foreign materials, such as water, oil and other materials; the length of the human stride at the time of slip; type of floor finish and condition of shoe sole.



interceramic.com



# WALL TILE COLLECTION

Glazed Ceramic Wall Tile

Interceramic  
CRAFTED FOR LIFE







# WALL TILE COLLECTION


Glazed Ceramic Wall Tile




### Suitable Rooms

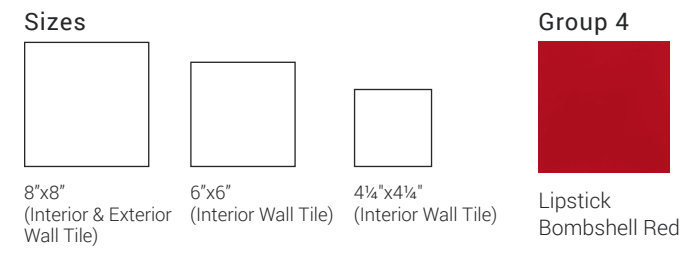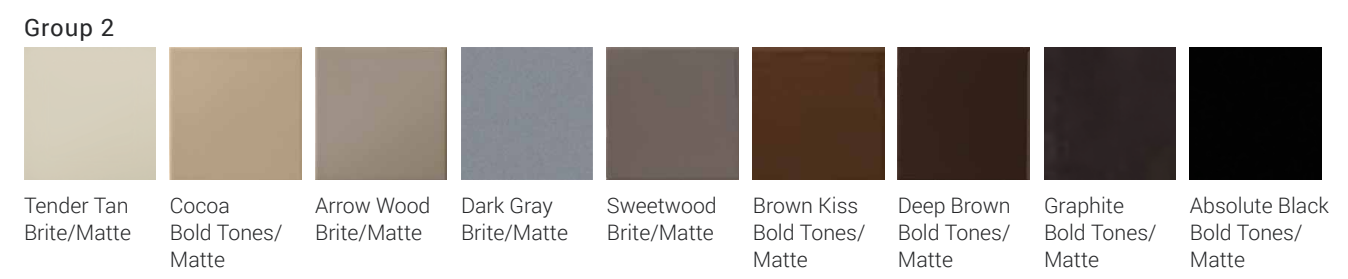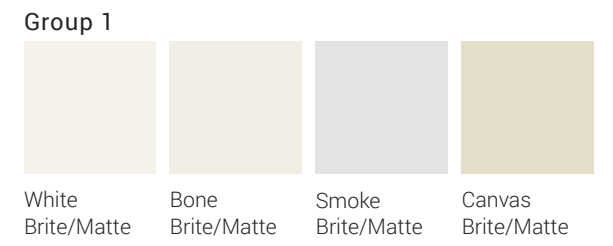





**SIZES**

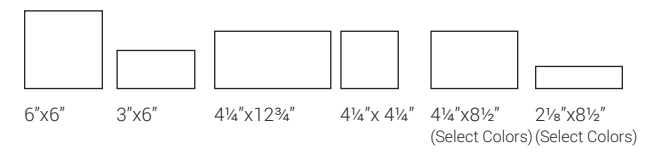

**TRIM** (Available in all colors)

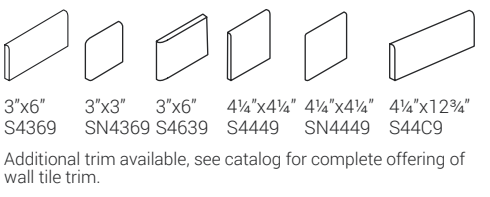

**Variation Rating: LOW**  
The least amount of shade and texture variation attainable in naturally fired clay products

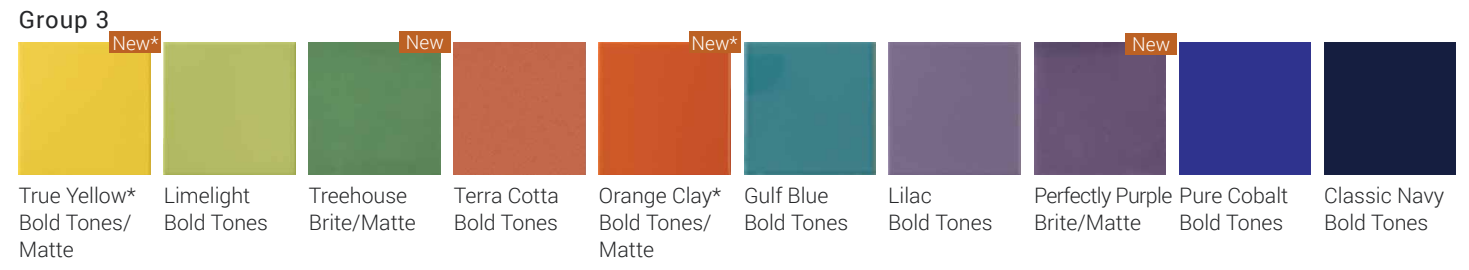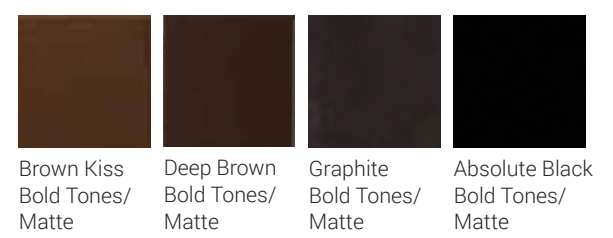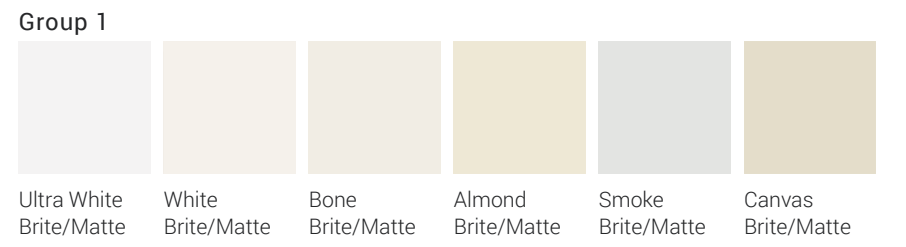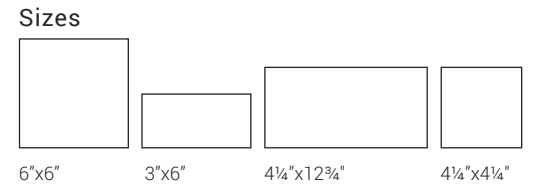

\* Now Available in Matte Finish

